


RFU out-feeder

The RFU out-feeders are used for removing dry and fine-grained wood waste collected in silos with flat bottom. The wood waste is intended for combustion in boilers or for further processing such as production of pellets.

Out-feeders are ideal to be used as boiler feeding device and backfiring protection together with additional equipment. Out-feeders in the flat bottom silos minimize the risk of material hang-up, ensure reliable boiler supplying with fuel, and optimal silo volume while minimizing its construction height. This is particularly vital when a silo is placed on the roof of a boiler room.

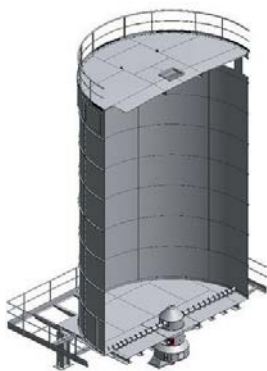


RFU800HD out-feeder mounted in a silo with flat bottom - version with one outlet



RFU800HD out-feeder in a silo on a support frame (version with distribution bin and multiple outlets)

RFU out-feeder

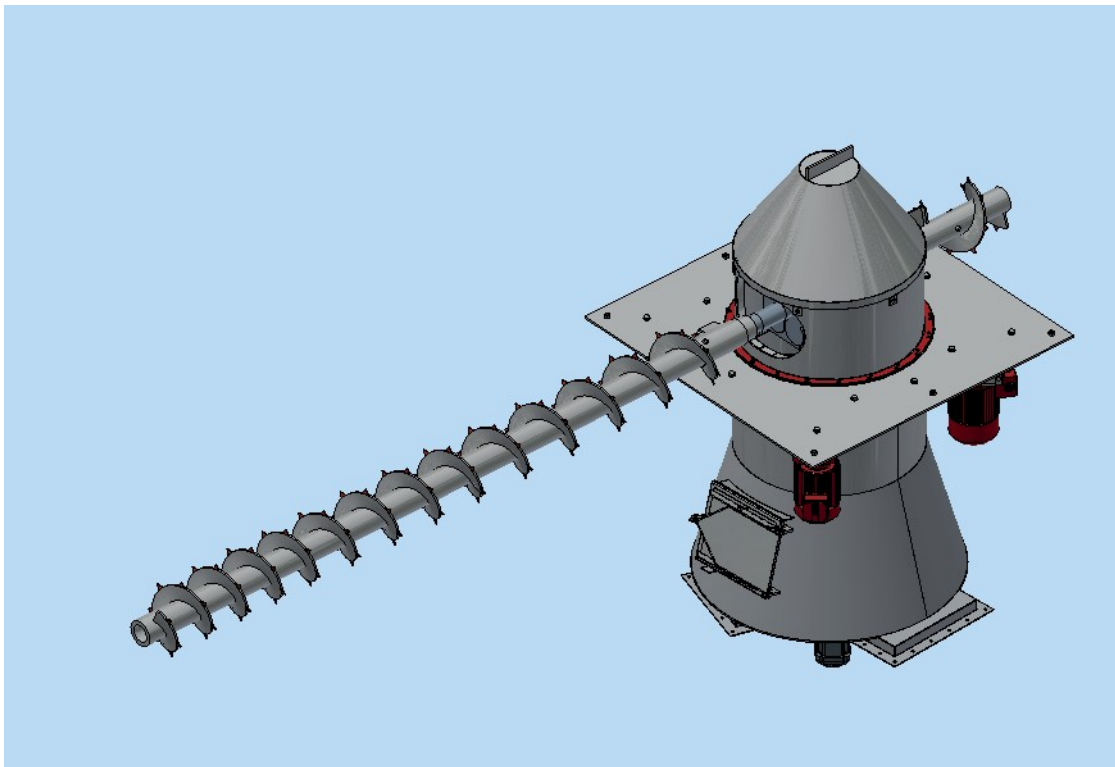

Technical Data

TYP	Capacity m ³ /h v.50hz	Main motor (kW)	Motor for circular screw rotation
RFF 600/4	1,9	0,37	0,55
RFF 600/8	3,9	0,75	0,55
RFF 600/16	7,9	1,5	0,55
RFF 800/27	20	4	2 x 0,55
RFF 800/31	25	4	2 x 0,55
RFF 800/HD	50	5,5/7,5	2 x 0,55